


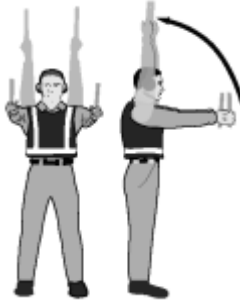

Marshalling signals (from a marshaller to an aircraft)

Source: http://www.opsi.gov.uk/si/si2007/uksi_20070734_en_3

(1) Each of the signals for the guidance of aircraft maneuvering on or off the ground, described in column 1 of Table 1 and as illustrated in column 3, when given by a marshaller to an aircraft, shall have the meanings specified in column 2 of the Table.

(2) By day any such signals shall be given by hand or by circular bats and by night shall be given by torches or by illuminated wands.

Table 1—Meaning of Marshalling Signals (from a marshaller to an aircraft)

| <i>Column 1</i> | <i>Column 2</i> | <i>Column 3</i> |
|--------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| <i>Description of Signal</i> | <i>Meaning of signal</i> | <i>Illustration of signal</i> |
| 1. Raise right hand above head level with wand pointing up; move left-hand wand pointing down toward body. | Wingwalker/guide —This signal provides an indication by a person positioned at the aircraft wing tip, to the pilot/marshaller/push-back operator, that the aircraft movement on/off a parking position would be unobstructed. |  |
| 2. Raise fully extended arms straight above head with wands pointing up | Identify gate |  |
| 3. Point both arms upward, move and extend arms outward to sides of body and point with wands to direction of next signalman or taxi area. | Proceed to next signalman or as directed by tower/ground control |  |

4. Bend extended arms at elbows and move wands up and down from chest height to head. Straight ahead



5(a) With right arm and wand extended at a 90-degree angle to body, make “come ahead” signal with left hand. Turn left (from pilot’s point of view)



5(b) With left arm and wand extended at a 90-degree angle to body, make “come ahead” signal with right hand. Turn right (from pilot’s point of view)



6(a) Fully extend arms and wands at a 90-degree angle to sides and slowly move to above head until wands cross. Normal stop



6(b) Abruptly extend arms and wands to top of head, crossing wands.



7(a) Raise hand just above shoulder height with open palm. Ensuring eye contact with flight crew, close hand into a fist. Do Not move until receipt of “thumbs up” acknowledgement from flight crew.



7(b) Raise hand just above shoulder height with hand closed in a fist. Ensuring eye contact with flight crew, open palm. Do not move until receipt of “thumbs up” acknowledgement from crew.




8(a) With arms and wands fully extending above head, move wands inwards in a “jabbing” motion until wands touch. Ensure acknowledgement is received from flight crew.



8(b) With arms and wands fully extended above head, move wands outward in “jabbing” motion. Do not remove chocks until authorised by crew.



9. Raise right arm to head level with wand pointing up and start a circular motion with hand; at the same time, with left arm raised above head level, point to engine to be started.



10. Extend arm with wand forward of body at shoulder level; move hand and wand to top of left shoulder and draw wand to top of right shoulder in a slicing motion across throat.



11. Move extended arms downwards in a “patting” gesture, moving wands up and down from waist to knees.



12. With arms down and wands toward ground, wave either right or left wand up and down indicating engine(s) on left or right side respectively should be slowed down.



13. With arms in front of body at waist height, rotate arms in a forward motion. To stop rearward movement, use signal 6(a) or 6(b).



14(a) Point left arm with wand down and bring right arm from overhead vertical position to horizontal forward position, repeating right-arm movement.



14(b) Point right arm with wand down and bring left arm from overhead vertical position to horizontal forward position, repeating left-arm movement.



15. Raise right arm to head level with wand pointing up or display hand with “thumbs up”; left arm remains at side by knee. Affirmative/all clear—This signal is also used as a technical/servicing communication signal.




16. Fully extend arms and wands at a 90-degree angle to sides. Hover



17. Fully extend arms and wands at a 90-degree angle to sides and, with palms turned up, move hands upwards. Speed of movement indicates rate of ascent. Move upwards



18. Fully extend arms and wands at a 90-degree angle to sides and, with palms turned down, move hands downwards. Speed of movement indicates rate of descent. Move downwards

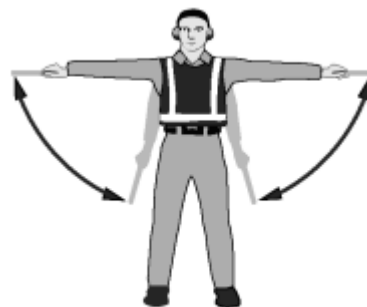

19(a) Extend arm horizontally at a 90-degree angle to right side of body. Move other arm in same direction in a sweeping motion.




19(b) Extend arm horizontally at a 90-degree angle to left side of body. Move other arm in same direction in a sweeping motion.



20. Cross arms with wands downwards and in front of body.



21. Move right-hand wand in a “fanning” motion from shoulder to knee, while at the same time pointing with left-hand wand to area of fire.



22. Fully extend arms and wands downwards at a 45-degree angle to sides. Hold position until aircraft is clear for next manoeuvre.




23. Perform a standard salute with right hand and/or wand to dispatch the aircraft. Maintain eye contact with flight crew until aircraft has begun to taxi.



24. Extend right arm fully above head and close fist or hold wand in horizontal position; left arm remains at side by knee.




25. Hold arms fully extended above head, open left hand horizontally and move finger tips of right hand into a touch open palm of left hand (forming a "T"). At night, illuminated wands can also be used to form the "T" above head.



26. Hold arms fully extended above head with finger tips of right hand touching open horizontal palm of left hand (forming a “T”); then move right hand away from the left. Do not disconnect power until authorised by flight crew. At night illuminated wands can also be used to form the “T” above head.

Disconnect power (technical/servicing communication signal)



27. Hold right arm straight out at 90 degrees from shoulder and point wand down to ground or display hand with “thumbs down”; left hand remains at side by knee.

Negative (technical/servicing communication signal)



28. Extend both arms at 90 degrees from body and move hands to cup both ears.

Establish communication via interphone (technical/servicing communication signal)



29. With right arm at side and left arm raised above head at a 45-degree angle, move right arm in a sweeping motion towards top of left shoulder.

Open/close stairs (technical/servicing communication signal)—This signal is intended mainly for aircraft with the set of integral stairs at the front



Marshalling signals (from a pilot of an aircraft to a marshaller)

Each of the signals described in column 1 of Table 2, when made by a pilot in an aircraft to a marshaller on the ground, shall have the meanings specified in column 2 of the Table:

Table 2—Meaning of Marshalling Signals (from a pilot of an aircraft to a marshaller)

| <i>Column 1</i> | <i>Column 2</i> |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|
| <i>Description of Signal</i> | <i>Meaning of Signal</i> |
| 1. Raise arm and hand with fingers extended horizontally in front of face, then clench fist. | Brakes engaged. |
| 2. Raise arm with fist clenched horizontally in front of face, then extend fingers. | Brakes released. |
| 3. Arms extended palms facing outwards, move hands inwards to cross in front of face. | Insert chocks. |
| 4. Hands crossed in front of face, palms facing outwards, move arms outwards. | Remove chocks. |
| 5. Raise the number of fingers on one hand indicating the number of the engine to be started. For this purpose the aircraft engines shall be numbered in relation to the marshaller facing the aircraft, from his right to his left. For example, No. 1 engine shall be the port outer engine, No. 2 engine shall be the port inner engine, No. 3 engine shall be the starboard inner engine and No. 4 engine shall be the starboard outer engine. | Ready to start engines. |